



**DMC VLFP-1002-C 2 Cell Vinyl Lacquer High Speed Plating Unit
DMC VLFP-1002-S(X) 2, 4 and 6 Cell Sump System****Features**

- Rugged Operator Friendly Design
- Durable SS and Polypropylene Construction
- 2 Cell Plating Module
- Titanium Anode Baskets
- High Flow Solution Circulation
- High Current Plating For Fast Cycle Time
- Programmable Control System
- Integrated Rectifier/Controller
- Rotating Cathode Head
- Integrated Filter Housing for each Cell
- Design Facilitates Process Maintenance
- Integrated Temperature Control System

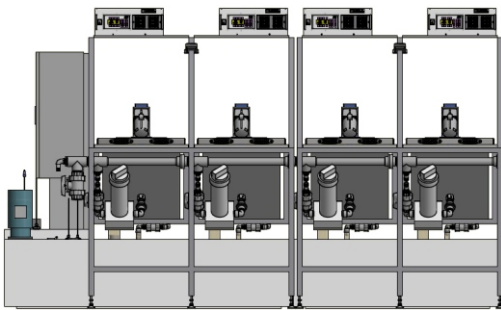

2 x VLFP-1002-C with VLFP-1002-S and VLFP-1002-SX 4 Cell Configuration

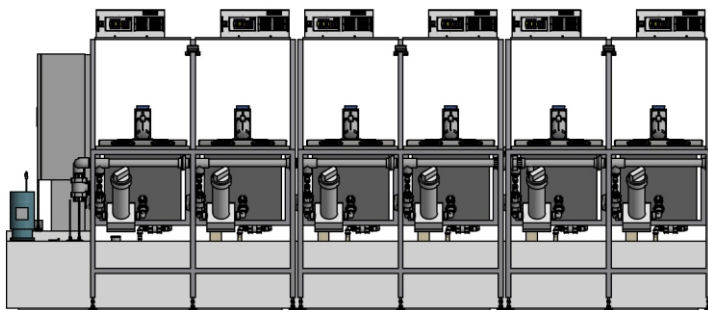

3 x VLFP-1002-C with VLFP-1002-S and 2 x VLFP-1002-SX 6 Cell Configuration

DMC VLFP-1002-C 2 Cell Vinyl Lacquer High Speed Plating Unit
DMC VLFP-1002-S(X) 2, 4 and 6 Cell Sump System

Specifications:

VLFP-1002 Plating Cells
Construction

Frame	Stainless Steel
Cell	Polypropylene
Plumbing	Polypropylene/PVC
Anode Basket	Titanium

Electrical Input

Voltage	208 to 240 VAC
Phase	1 Ph
Freq.	50/60 Hz.

Dimensions

Length	54 inch (1372 mm)
Depth	36 inch (915 mm)
Height	63 inch (1600 mm)

Plating Power Supply

Max. Current	2 x 200 Amps (200 amps per cell)
Max. Voltage	12 VDC (per cell)
Control	Programmable MicroController

Cell

Head Rotation Speed	60 rpm
Solution Volume	30 gals (114 Liters) per cell
Anode Basket	2 per cell
Anode Basket Material	Titanium
Anode Capacity	50 lbs (23 kg) per cell
Filtration	1 10in. per cell

Specifications:

VLFP-1002 Plating Sump
Construction

Sump	Polypropylene
Plumbing	Polypropylene/PVC
Dummy Anode Basket	Titanium

Electrical Input

Voltage	208 to 240 VAC
Phase	3 Ph
Freq.	50/60 Hz.

Dimensions


Length	72 inch (1372 mm)
Depth	36 inch (915 mm)
Height	36 inch (915 mm)

Process

Pump	1 HP
Heater	6 kW
Temperature Control	+/- 1 deg. F
Working Temp.	118 to 140 F (47 to 600 C)
Capacity	
1002-S	60 gals (228 liters)
1002-SX	55 gals (209 liters)


**DMC VLFP-1002-C 2 Cell Vinyl Lacquer High Speed Plating Unit
DMC VLFP-1002-S(X) 2, 4 and 6 Cell Sump System**

VLFP-1002-C with VLFP-1002-S - 2 Cell Configuration

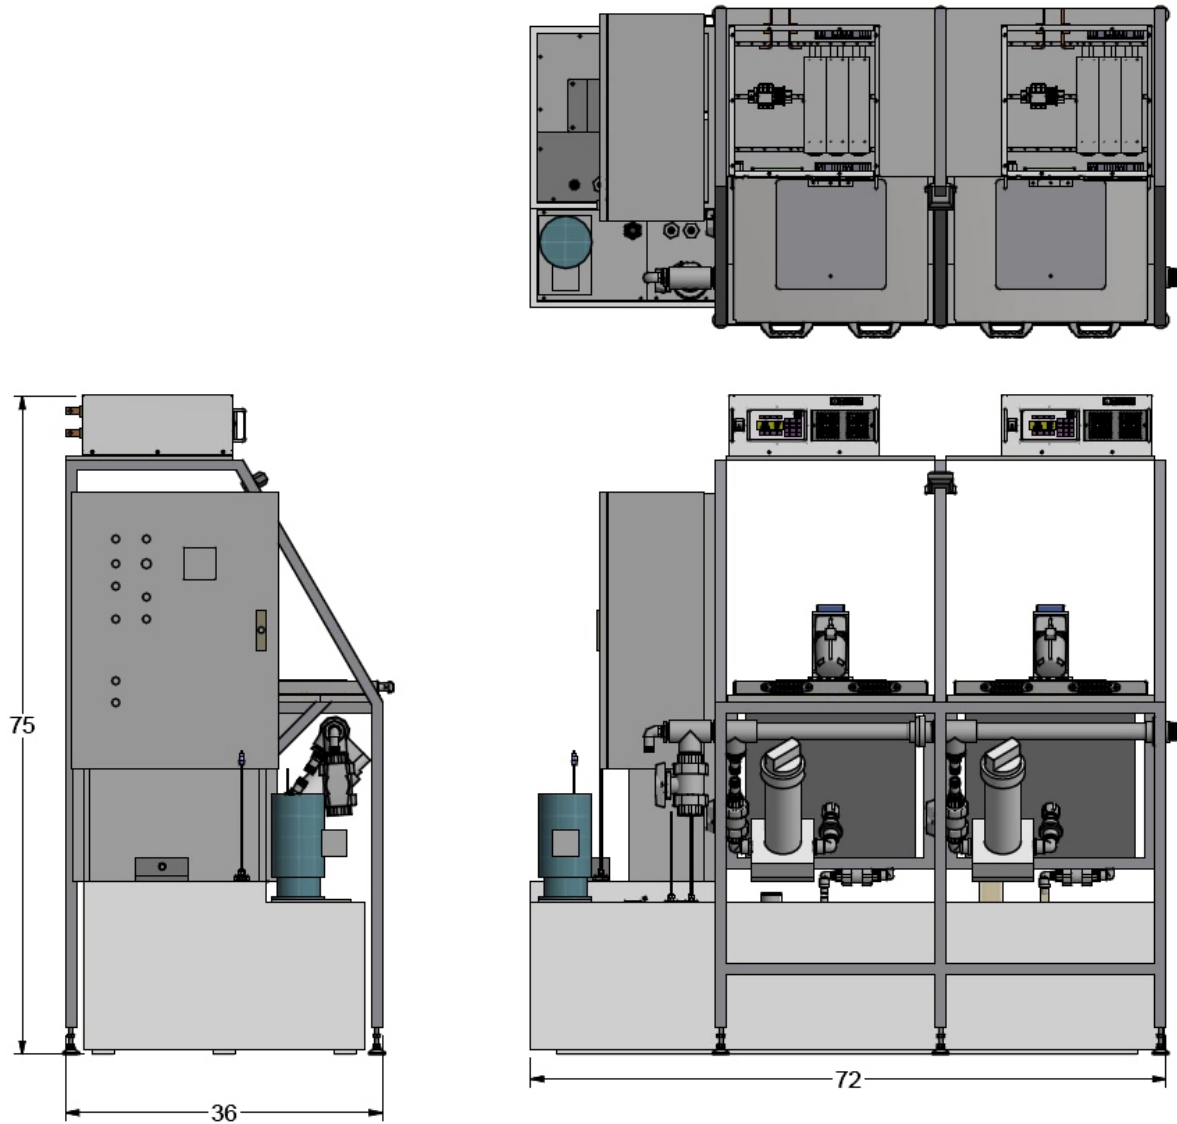


DMC VLFP-1002-C 2 Cell Vinyl Lacquer High Speed Plating Unit
DMC VLFP-1002-S(X) 2, 4 and 6 Cell Sump System


2 x VLFP-1002-C with VLFP-1002-S and VLFP-1002-SX 4 Cell Configuration

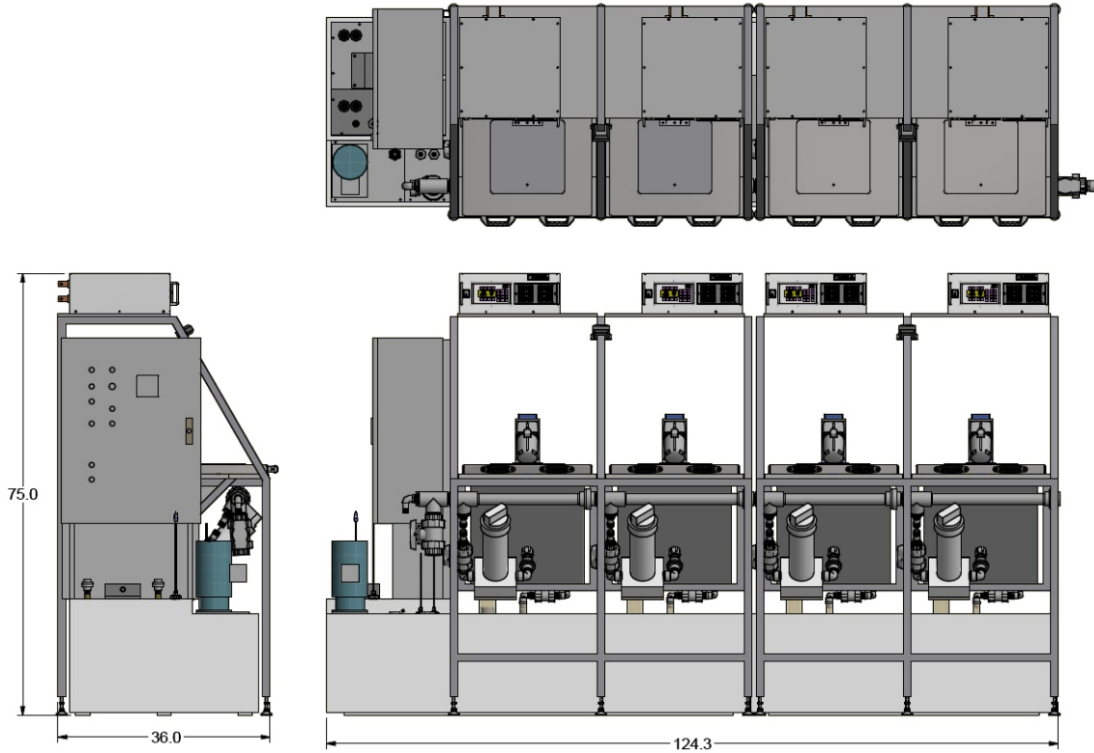

3 x VLFP-1002-C with VLFP-1002-S and 2 x VLFP-1002-SX 6 Cell Configuration

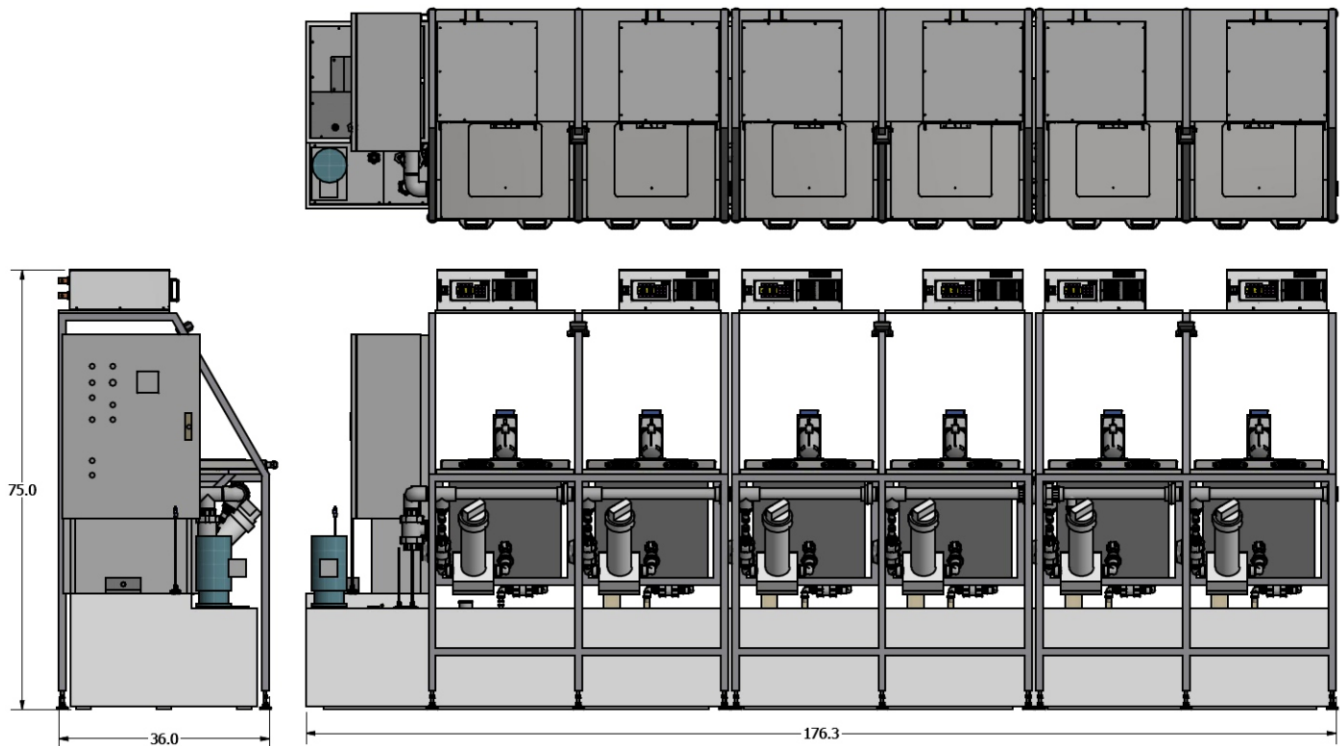

DMC VLFP-1002-C 2 Cell Vinyl Lacquer High Speed Plating Unit
DMC VLFP-1002-S(X) 2, 4 and 6 Cell Sump System

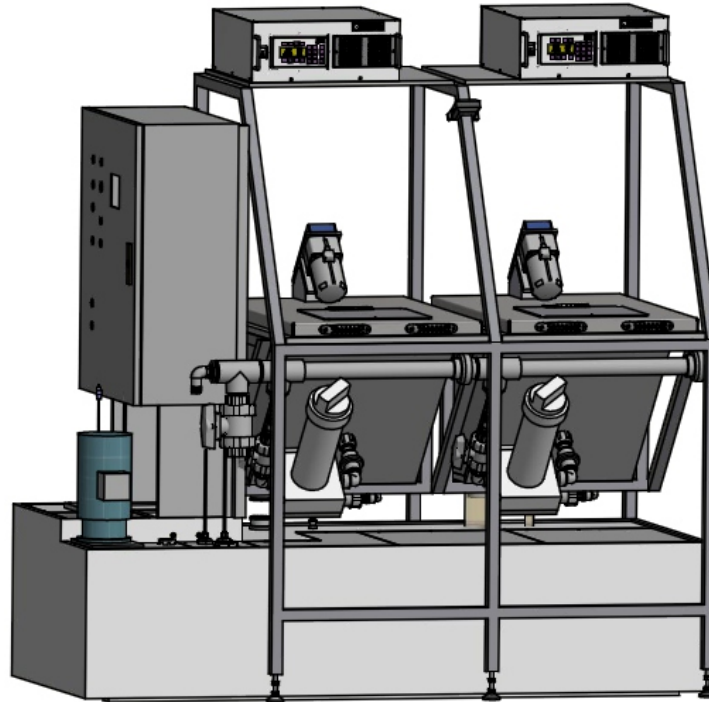

Sales and Support

Japan

DCA Inc.
Nozomu Hayatu
tel. +81 (44) 888-1388
email nozmu@dcainc.com
216-0033 Kanagawa
Kawasaki
8-26, 2-chome Miyazaki Miyamae-ku
5th Marutei Bldg 4F Japan

South Korea

Global Tech Co. , Ltd.
John Ryu
tel. +82 (11) 407 1697
email globaldmc@naver.com
1147-4, Neung Dong, Hwa Sung Si
Kyoung Ki Do 445-320
South Korea

North America

Digital Matrix Corp.
Alex Greenspan
tel. +1 516 481 7990
email
alex.greenspan@digmatrix.com
34 B Sarah Drive
Farmingdale, NY 11735
USA