

## Features

- Rugged Operator Friendly Design
- Durable Polypropylene Construction
- 4 Position Plating With Traversing Cathode
- 4 Titanium Basket/Static Anode
- Low Flow Solution Circulation
- Low Current Plating For High Surface Quality
- Programmable Control System
- Precision Temperature Control
- Integrated Solution Filtration



## Specifications:

### Construction

Frame	Stainless Steel
Shell Material	Polypropylene
Plumbing	Polypropylene/PVC
Anode Basket	Titanium

### Electrical Input

Voltage	208 to 240 VAC
Phase	1 Ph
Freq.	50/60 Hz.
Max. Current	20 A.

### Dimensions

Length	51 in. (1302 mm)
Depth	30 in. (753 mm)
Height	72 in. (1821 mm)

### Plating Power Supply

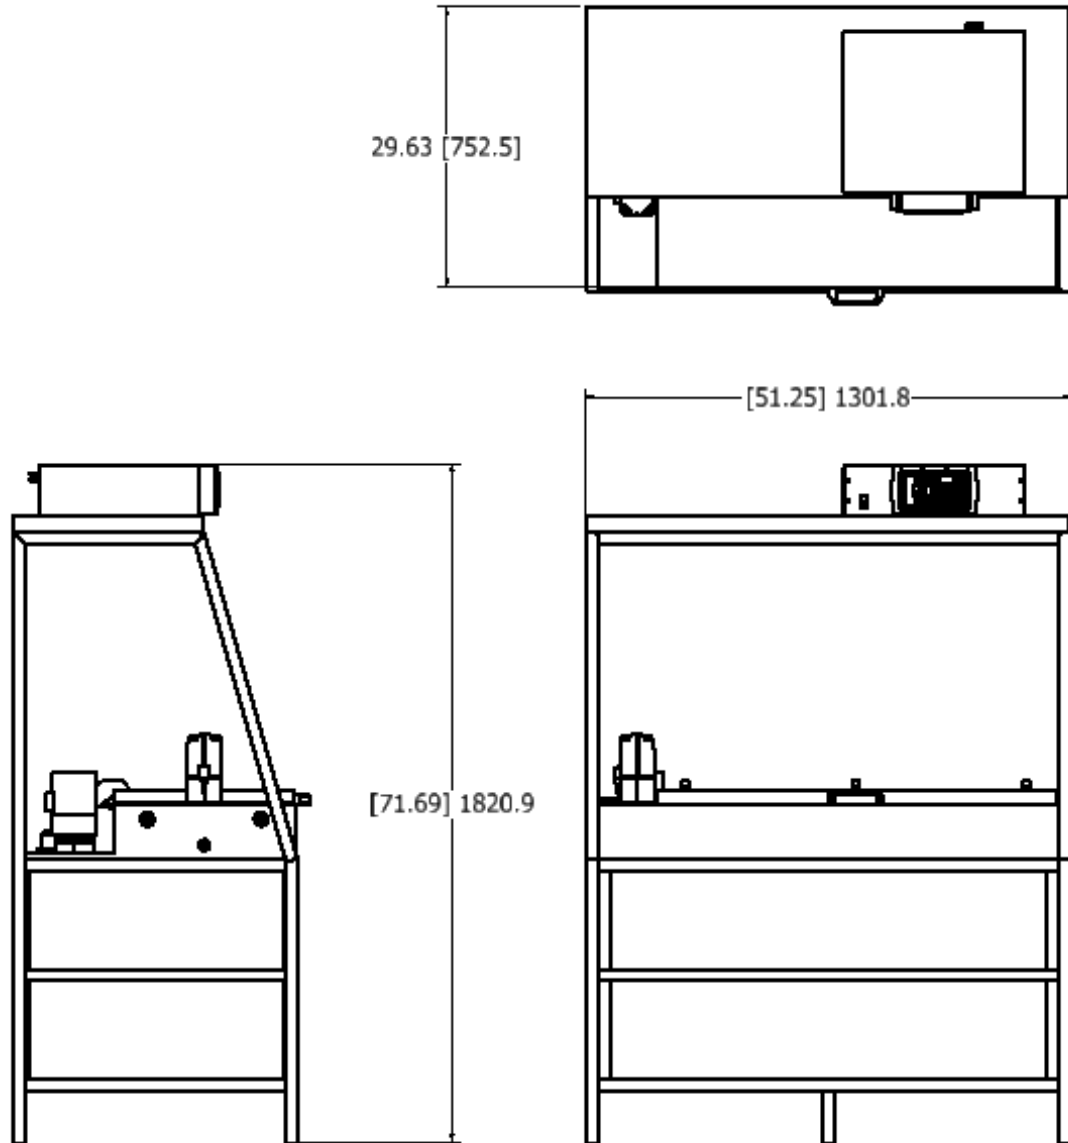
Max. Current	1 x 200 Amps
Max. Voltage	12 VDC

### Heating System

Temperature Control	+/-1 degree F/C
Wattage	6 kW

### Filtration

Pump	1/2 hp
Filter	1 x 10" SOE


**Sales and Support**
*Japan*

**DCA Inc.**  
**Nozomu Hayatu**  
 tel. +81 (44) 888-1388  
 email [nozmu@dcainc.com](mailto:nozmu@dcainc.com)  
 216-0033 Kanagawa  
 Kawasaki  
 8-26, 2-chome Miyazaki Miyamae-ku  
 5th Marutei Bldg 4F Japan

*South Korea*

**Global Tech Co. , Ltd.**  
**John Ryu**  
 tel. +82 (11) 407 1697  
 email [globaldmc@naver.com](mailto:globaldmc@naver.com)  
 1147-4, Neung Dong, Hwa Sung Si  
 Kyoung Ki Do 445-320  
 South Korea

*North America*

**Digital Matrix Corp.**  
**Alex Greenspan**  
 tel. +1 516 481 7990  
 email  
[alex.greenspan@digmatrix.com](mailto:alex.greenspan@digmatrix.com)  
 34 B Sarah Drive  
 Farmingdale, NY 11735  
 USA